

CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. HYSC-24

Length : 360 mm

Weight : 2.7 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 56 cc

Max Output : 6.7 tons / 66 kN

■ Cutting Capacity:

Wire rope 6x7 : 24 mm

Wire rope 6x12 : 24 mm

Wire rope 6x19 : 24 mm

Soft copper bar : 23 mm

Soft aluminium bar : 24 mm

Soft steel bar : 16 mm

Cu strands : 24 mm

Al strands : 24 mm

ACSR : 24 mm

(Note : Tensile strength (daN/mm²) ≤ 180)

Cutting of piano wire is prohibited.

■ Features:

- 180°Rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- Single stage pumping action.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single stage pump action with spring return.
- No set-up time required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



HYSC-24 #11	Moving Blade
HYSC-24 #3	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. S-24

Length : 425 mm

Weight : 4.2 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 55 cc

Max Output : 8 tons / 78 kN

■ Cutting Capacity:

Wire rope 6x7 : 18 mm

Wire rope 6x12 : 24 mm

Wire rope 6x19 : 24 mm

Soft steel bar : 20 mm

Reinforcing rod : 16 mm

Cu strands : 24 mm

Al strands : 24 mm

ACSR : 24 mm

Guy wire 1x7 : 20 mm

Guy wire 1x19 : 20 mm

Underground cable : 24 mm

Cutting of piano wire is prohibited.

■ Features:


- 180°Rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- Two stage pumping action.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single stage pump action with spring return.
- No set-up time required.
- Lightweight, self-contained tool, can be used anywhere.
- One spare cutting blade can be stored inside of the moveable handle.

■ Accessories:

Carrying Bag



S-24 #56	Moving Blade
S-24 #55	Fixed Blade

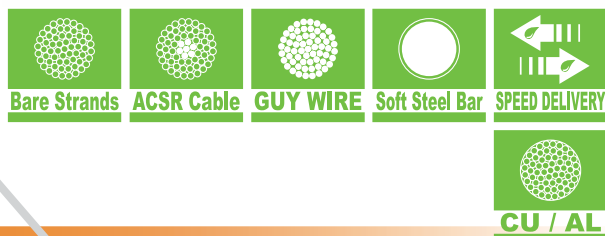

CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. HYSC-32

Length : 580 mm

Weight : 9.1 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 165 cc

Max Output : 14.3 tons / 141 kN

■ Cutting Capacity:

Wire rope 6x7 : 32 mm

Wire rope 6x12 : 32 mm

Wire rope 6x19 : 32 mm

Soft steel bar : 25 mm

Reinforcing rod : 25 mm

Cu strands : 32 mm

Al strands : 32 mm

ACSR : 32 mm

Guy wire 1x7 : 32 mm

Guy wire 1x19 : 32 mm

Underground cable : 32 mm

Cutting of piano wire is prohibited.

■ Features:

- Single Stage Pumping action.
- 180° Rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Spring return.
- No set-up required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



HYSC-32 #56	Moving Blade
HYSC-32 #53	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. HYSC-45

Length : 683 mm

Weight : 6.8 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 147 cc

Max Output : 9.7 tons / 95 kN

■ Cutting Capacity:

Wire rope 6x7 : 40 mm

Wire rope 6x12 : 40 mm

Wire rope 6x19 : 40 mm

Soft copper bar : 32 mm

Soft aluminium bar : 40 mm

Soft steel bar : 20 mm

Cu strands : 40 mm

Al strands : 40 mm

ACSR : 40 mm

Cutting of piano wire is prohibited.

■ Features:


- Light weight portable hydraulic cutter features.
- Single action cylinder with spring return.
- Guillotine type cutting for less jamming than shear type cutting.
- No set-up time required.
- Blades are easily replaceable.
- 180° swivel and lock pin type head allows easy cutting position.

■ Accessories:

Carrying Bag



HYSC-45 #8	Moving Blade
HYSC-45 #2	Fixed Blade

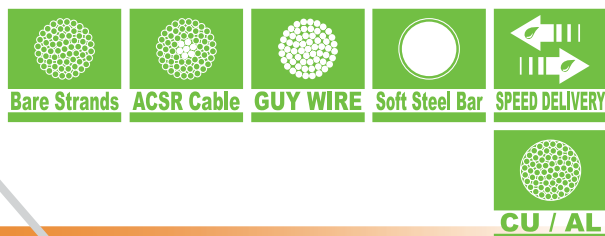

CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. S-55

Length : 631 mm

Weight : 10.3 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 89 cc

Max Output : 12.7 tons / 124.5 kN

■ Cutting Capacity:

Wire rope 6x7 : 25 mm

Wire rope 6x12 : 30 mm

Wire rope 6x19 : 30 mm

Soft copper bar : 35 mm

Soft aluminium bar : 28 mm

Soft steel bar : 22 mm

Reinforcing rod : 19 mm

Cu strands : 54 mm

Al strands : 54 mm

ACSR : 54 mm

Guy wire 1x7 : 15 mm

Guy wire 1x19 : 20 mm

Underground cable : 50 mm

Cutting of piano wire is prohibited.

■ Features:


- Light weight portable hydraulic cutter features.
- Single action cylinder with spring return.
- Guillotine type cutting for less jamming than shear type cutting.
- No set-up time required.
- Blades are easily replaceable.
- 180° swivel and lock pin type head allows easy cutting position.

■ Accessories:

Carrying Bag



S-55 #70	Moving Blade
S-55 #87	Fixed Blade

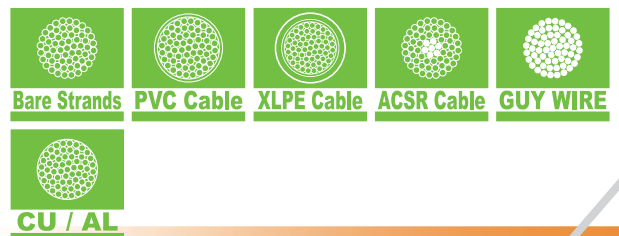

CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. HYCC-P85

Length : 716 mm

Weight : 9.7 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 145 cc

Max Output : 5 tons / 49 kN

■ Cutting Capacity:

Cu strands : 28mm

Al strands : 38 mm

CCP cable : 85 mm

Underground cable : 50 mm

Cutting of piano wire is prohibited.

■ Features:

- Lock pin type cutting head .
- Two stage pumping action for rapid blade advance.
- 180° rotating head for convenient operation.
- Superior guillotine type cutting for of less jamming than shear type cutters.
- All blades are easily replaceable.
- Spring return.
- No set-up time required.
- Light weight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



CE

HYCC-P85 #57	Moving Blade
HYCC-P85 #39	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. TC-085

Length : 667 mm

Weight : 8.5 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 168 cc

Max Output : 5.6 tons / 56 kN

■ Cutting Capacity:

Cu strands : 85 mm

Al strands : 85 mm

CCP cable : 85 mm

Cutting of piano wire is prohibited.

■ Features:

- Two stage pumping action for rapid blade advance.
- 180°Rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Spring return.
- No set-up required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



TC-085 #15	Moving Blade
TC-085 #1	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. PC-8511

Length : 681 mm

Weight : 9.0 kgs

■ Specifications:

Max. Pressure : 700 bar / 10000 psi

Oil Required : 168 cc

Max Output : 10.6 tons / 104.3 kN

■ Cutting Capacity:

Cu cable : 85 mm

Al cable : 85 mm

CCP cable : 85 mm

Cutting of piano wire is prohibited.

■ Features:

- Two stage pumping action for rapid blade advance.
- 180° Rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Spring return.
- No set-up required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



PC-8511 #58	Moving Blade
PC-8511 #57	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. HYCC-85YC

Length : 694 mm

Weight : 9.0 kgs

■ Specifications:

Max. Pressure : 700 bar / 10000 psi

Oil Required : 255 cc

Max Output : 7.5 tons / 73.7 kN

■ Cutting Capacity:

Cu cable : 60 mm

Al cable : 60 mm

CCP cable : 85 mm

Underground cable : 85 mm

Cutting of piano wire is prohibited.

■ Features:

- Scissor type cutting head for convenient operation.
- Two stage pumping action for rapid blade advance.
- 180° Rotating head plus an extra handle for easy carry and overhead convenient operation.
- No set-up required.

■ Accessories:

Carrying Bag



HYCC-85YC #64	Moving Blade
HYCC-85YC #65	Moving Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. YS-30A

Length : 481 mm

Weight : 4.0 kgs

■ Specifications:

Max. Pressure : 700 bar / 10000 psi

Oil Required : 23 cc

Max Output : 7.9 tons / 77.8 kN

■ Cutting Capacity:

Cu strands : 28 mm

Al strands : 28 mm

Telephone cable : 30 mm

Underground cable : 30 mm

ACSR : 19 mm

CCP cable : 30 mm

Cutting of piano wire is prohibited.

■ Features:

- Light weight portable hydraulic cutter features.
- Single action cylinder with spring return.
- Scissor type cutting for less jamming than shear type cutting.
- No set-up time required.
- Blades are easily replaceable.
- 180 degree swivel and lock pin type head allows easy cutting position.

■ Accessories:

Carrying Bag



YS-30A #7	Moving Blade
YS-30A #8	Moving Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. HYCC-050

Length : 486 mm

Weight : 3.9 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 89 cc

Max Output : 5 tons / 49 kN

■ Cutting Capacity:

Cu strands : 50 mm

Al strands : 50 mm

CCP cable : 50 mm

Cutting of piano wire is prohibited.

■ Features:

- 180°Rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- Single stage pumping action.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Spring return.
- No set-up time required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



CE

HYCC-050 #10	Moving Blade
HYCC-050 #1	Fixed Blade



CUTTERS



■ Model No. HYSC-20HE

Length : 240 mm

Weight : 2.0 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 19 cc

Max Output : 5.3 tons / 52 kN

■ Cutting Capacity:

Wire rope 6x7 : 16 mm

Wire rope 6x12 : 20 mm

Wire rope 6x19 : 20 mm

Soft copper bar : 20 mm

Soft aluminium bar : 16 mm

Underground cable : 18 mm

Soft steel bar : 16 mm

Reinforcing rod : 13 mm

Cu strands : 20 mm

Al strands : 20 mm

ACSR : 21 mm

Guy wire 1x7 : 15 mm

Guy wire 1x19 : 16 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700bar (10,000 psi).
- Single action piston/cylinder arrangement.
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single action cylinder with spring return.



■ Accessories:

Carrying Bag



HYSC-20HE #2	Moving Blade
HYSC-20HE #17	Fixed Blade



CUTTERS



■ Model No. HYSC-24HE

Length : 240 mm

Weight : 2.1 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 27cc

Max Output : 6.7 tons / 66 kN

■ Cutting Capacity:

Wire rope 6x7 : 24 mm

Wire rope 6x12 : 24 mm

Wire rope 6x19 : 24 mm

Soft copper bar : 23 mm

Soft aluminium bar : 24 mm

Soft steel bar : 16 mm

Cu strands : 24 mm

Al strands : 24 mm

ACSR : 24 mm

(Note : Tensile strength (daN/mm²) ≤ 180)

Cutting of piano wire is prohibited.

■ Features:

- Superior guillotine type cutting for less jamming than shear type cutters.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- No set-up time required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



HYSC-24HE #7	Moving Blade
HYSC-24HE #2	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools



■ Model No. S-24HE

Length : 170 mm

Weight : 3.0 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 55 cc

Max Output : 8 tons / 78 kN

■ Cutting Capacity:

Wire rope 6x7 : 18 mm

Wire rope 6x12 : 24 mm

Wire rope 6x19 : 24 mm

Soft steel bar : 20 mm

Reinforcing rod : 16 mm

Cu strands : 24 mm

Al strands : 24 mm

ACSR : 24 mm

Guy wire 1x7 : 20 mm

Guy wire 1x19 : 20 mm

Soft copper bar : 24 mm

Soft aluminium bar : 18 mm

Underground cable : 24 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700bar (10,000 psi).
- Single action piston/cylinder arrangement.
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag



S-24HE #13	Moving Blade
S-24HE #12	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. **HYSC-32HE**

Length : 300 mm

Weight : 8.9 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 135 cc

Max Output : 25.4 tons / 249 kN

■ Cutting Capacity:

Wire rope 6x7 : 32 mm

Wire rope 6x12 : 32 mm

Wire rope 6x19 : 32 mm

Soft steel bar : 25 mm

Reinforcing rod : 25 mm

Cu strands : 32 mm

Al strands : 32 mm

ACSR : 32 mm

Guy wire 1x7 : 32 mm

Guy wire 1x19 : 32 mm

Soft copper bar : 32 mm

Soft aluminium bar : 32 mm

Underground cable : 32 mm


Cutting of piano wire is prohibited.

■ Features:

- Functional handle for convenient operation.
- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).
- Single action piston/cylinder arrangement.
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag

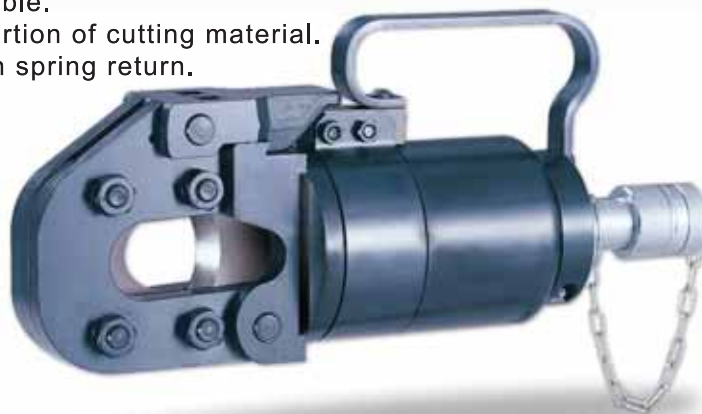

HYSC-32HE #13	Moving Blade
HYSC-32HE #2	Fixed Blade



CUTTERS

■ Model No. **HYSC-45HE**

Length : 346 mm

Weight : 4.5 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 70 cc

Max Output : 9.7 tons / 95 kN

■ Cutting Capacity:

Wire rope 6x7 : 40 mm

Wire rope 6x12 : 40 mm

Wire rope 6x19 : 40 mm

Soft copper bar : 32 mm

Soft aluminium bar : 40 mm

Soft steel bar : 20 mm

Cu strands : 40 mm

Al strands : 40 mm

ACSR : 40 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.

■ Accessories:

Carrying Bag



HYSC-45HE #15	Moving Blade
HYSC-45HE #10	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. S-55HE

Length : 365 mm

Weight : 7.2 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 89 cc

Max Output : 12.7 tons / 124.5 kN

■ Cutting Capacity:

Wire rope 6x7 : 25 mm

Wire rope 6x12 : 30 mm

Wire rope 6x19 : 30 mm

Soft copper bar : 35 mm

Soft aluminium bar : 28 mm

Soft steel bar : 22 mm

Reinforcing rod : 19 mm

Cu strands : 54 mm

Al strands : 54 mm

ACSR : 54 mm

Guy wire 1x7 : 15 mm

Guy wire 1x19 : 20 mm

Underground cable : 50 mm


Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700bar (10,000 psi).
- Single action piston/cylinder arrangement.
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag

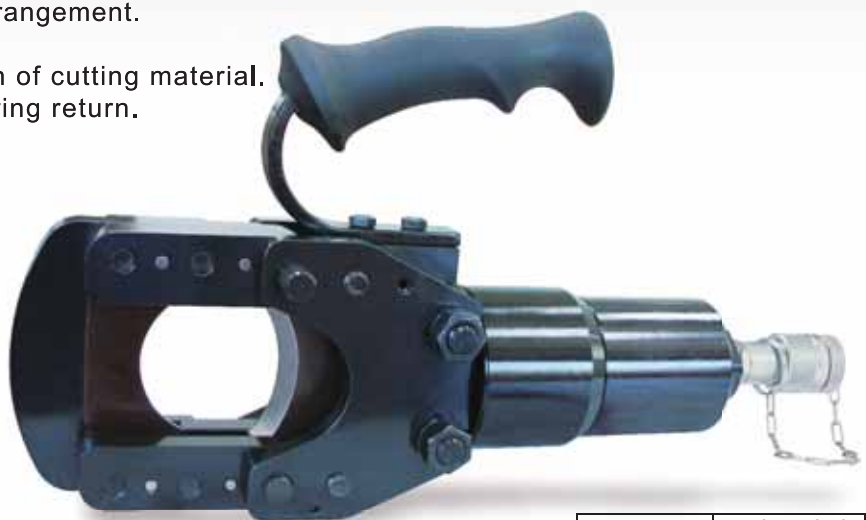

S-55HE #9	Moving Blade
S-55HE #26	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools



■ Model No. HYSC-55HE

Length : 415 mm

Weight : 8.4 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 106 cc

Max Output : 14.9 tons / 146 kN

■ Cutting Capacity:

Wire rope 6x7 : 25 mm

Wire rope 6x12 : 30 mm

Wire rope 6x19 : 30 mm

Soft steel bar : 22 mm

Reinforcing rod : 19 mm

Cu strands : 50 mm

Al strands : 50 mm

ACSR : 50 mm

Guy wire 1x7 : 15 mm

Guy wire 1x19 : 20 mm

Soft copper bar : 24 mm

Soft aluminium bar : 18 mm

Underground cable : 24 mm

Cutting of piano wire is prohibited.

■ Features:

- Functional handle for convenient operation.
- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single stage pump action with spring return.

■ Accessories:

Carrying Bag



HYSC-55HE #2	Moving Blade
HYSC-55HE #14	Fixed Blade



CUTTERS

■ Model No. **HYCC-35HE**

Length : 365 mm

Weight : 3.5 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 63 cc

Max Output : 6.4 tons / 63 kN

Jaw Opening : 35 mm

■ Cutting Capacity:

Cu strands : 35 mm

Al strands : 35 mm

Cutting of piano wire is prohibited.

■ Features:

- C-framed open cutter for easy access to the cable.
- Fast cutting with remote operation.
- Operated by any hydraulic pump with rated oil pressure of 700 bar(10,000 psi).
- Blades are easily replaceable.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag



HYCC-35HE #3	Moving Blade
HYCC-35HE #2	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. **HYCC-050HE**

Length : 342 mm

Weight : 3.2 kgs



■ Specifications:

Oil Required : 70 cc

Max Output : 5 tons / 49 kN

■ Cutting Capacity:

Cu strands : 50 mm

Al strands : 50 mm

CCP cable : 50 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.

■ Accessories:

Carrying Bag



HYCC-050HE #6	Moving Blade
HYSC-050HE #1	Fixed Blade



CUTTERS

■ Model No. **HYCC-P85HE**

Length : 430 mm

Weight : 6.8 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 65 cc

Max Output : 5 tons / 49 kN

■ Cutting Capacity:

Cu strands : 28 mm

Al strands : 38 mm

CCP cable : 85 mm

Underground cable : 50 mm

Cutting of piano wire is prohibited.

■ Features:

- Functional handle for convenient operation.
- Lock pin type cutting head.
- Fast cutting with remote operation.
- Operated by any hydraulic pump with rated oil pressure of 700 bar(10,000 psi).
- Blades are easily replaceable.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag



HYCC-P85HE #10	Moving Blade
HYCC-P85HE #5	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. **HYCC-P100HE**

Length : 544 mm

Weight : 12.7 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 140 cc

Max Output : 8.8 tons / 87 kN

■ Cutting Capacity:

Cu strands : 42 mm

Al strands : 46 mm

CCP cable : 100 mm

Cutting of piano wire is prohibited.

■ Features:

- Functional handle for convenient operation.
- Lock pin type cutting head.
- Fast cutting with remote operation.
- Operated by any hydraulic pump with rated oil pressure of 700 bar(10,000 psi).
- Blades are easily replaceable.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag



HYCC-P100HE #16	Moving Blade
HYCC-P100HE #17	Fixed Blade



CUTTERS

■ Model No. HYCC-105HE

Length : 590 mm

Weight : 13.2 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 178 cc

Max Output : 10.2 tons / 100 kN

■ Cutting Capacity:

Cu strands : 42 mm

Al strands : 46 mm

CCP cable : 105 mm

Cutting of piano wire is prohibited.

■ Features:

- Functional handle for convenient operation.
- Lock pin type cutting head.
- Fast cutting with remote operation.
- Operated by any hydraulic pump with rated oil pressure of 700 bar(10,000 psi).
- Blades are easily replaceable.
- Single action cylinder with spring return.

■ Accessories:

Plastic Carrying Case



HYCC-105HE #2	Moving Blade
HYCC-105HE #1	Fixed Blade



CUTTERS

■ Model No. TC-085HE

Length : 373 mm

Weight : 4.9 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 73 cc

Max Output : 5.6 tons / 56 kN

■ Cutting Capacity:

Cu strands : 85 mm

Al strands : 85 mm

CCP cable : 85 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).
- Blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag



TC-085HE #4	Moving Blade
TC-085HE #3	Fixed Blade



CUTTERS

■ Model No. TC-120HE

Length : 560 mm

Weight : 9.6 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 193 cc

Max Output : 10.6 tons / 105 kN

■ Cutting Capacity:

Cu cable : 120 mm

Al cable : 120 mm

CCP cable : 120 mm

Cutting of piano wire is prohibited.

■ Features:

- Functional handle for convenient operation.
- Lock pin type cutting head.
- Fast cutting with remote operation.
- Operated by any hydraulic pump with rated oil pressure of 700 bar(10,000 psi).
- Blades are easily replaceable.
- Single action cylinder with spring return.

■ Accessories:

Carrying Bag



TC-120HE #17	Moving Blade
TC-120HE #26	Fixed Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. **HYCC-096S**

Length : 394 mm

Weight : 8.1 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 125 cc

Max Output : 13.5 tons / 132.3 kN

■ Cutting Capacity:

Cu cable : 95 mm

Al cable : 95 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).

■ Accessories:

Carrying Bag



HYCC-096S #3	Moving Blade
HYCC-096S #3	Moving Blade



CUTTERS

KuDos®

Professional
Hydraulic
Tools

■ Model No. P-85YC

Length : 395 mm

Weight : 5.0 kgs

■ Specifications:

Max. Pressure : 700 bar / 10000 psi

Oil Required : 48 cc

Max Output : 7.5 tons / 73.5 kN

■ Cutting Capacity:

Cu cable : 60 mm

Al cable : 60 mm

CCP cable : 85 mm

Underground cable : 85 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).

■ Accessories:

Carrying Bag



P-85YC #6	Moving Blade
P-85YC #7	Moving Blade



CUTTERS

■ Model No. YS-30AHE

Length : 277 mm

Weight : 3.0 kgs

■ Specifications:

Max. Pressure : 700 bar / 10000 psi

Oil Required : 23 cc

Max Output : 7.9 tons / 77.8 kN

■ Cutting Capacity:

Cu strands : 28 mm

Al strands : 28 mm

Telephone cable : 30 mm

Underground cable : 30 mm

ACSR : 19 mm

CCP cable : 30 mm

Cutting of piano wire is prohibited.

■ Features:

- Fast cutting with remote operation.
- Operated any hydraulic pump with rated oil pressure of 700 bar(10,000psi).

■ Accessories:

Carrying Bag



YS-30AHE #4	Moving Blade
YS-30AHE #5	Moving Blade

